

## **STAINLESS STEEL TANKER - STANDARD TECHNICAL SPECIFICATION**



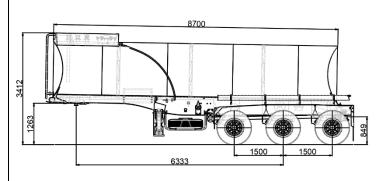

	DIMENSIONS	
DIMENSIONS		
LENGTH	8m length barrel	
CAPACITY	25,000 L single compartment - lead 27,500 L single compartment - tag	
	CONSTRUCTION	
BARREL	5mm 316l stainless steel, mill grade finish	
BULKHEAD/BAFFEL	5mm 316l stainless steel, mill grade finish	
TOP FITTINGS	Stainless steel hatch 80mm camlock fill Free air vent	
PIPEWORK	Primary discharge butterfly valve at the rear of tank through 80mm stainless steel pipe discharge to both sides of trailer	
PUMP	Honda GX270 petrol engine coupled with Ebara 3LSF stainless steel pump for pressure discharge	
AIR PURGE	Air purge system with pp control valve	
HOSE & HOSE CARRIERS	Flexi hose supplied with 150mm stainless steel hose tubes on both sides of trailer	
ROLLOVER PROTECTION	U type coamings of 3mm stainless steel fitted at top of tank to protect all fittings compete with drain tubes and hoses.  Provision for water storage within with stainless ball valve taps	

ELECTRICAL		
LIGHTS	LED multi-volt lighting to ADR 13/00, Road Train & 7 Pin standard, Wiring in conduit	
	Work lights fitted on both side of trailer near discharge points	
RUNNING GEAR		
SUSPENSION	K-Hitch KT250 Airbag	
AXLE	K-Hitch disc brake axle with 10/285 PCD hubs	
BRAKE	EBS Road Train brakes	
LANDING LEG	2 speed wind down legs with compensating feet	
WHEELS	10/285 PCD alloy wheels (13)	
TYRES	11R22.5 tubeless tyres (13)	
TYRE CARRIER	Dual swing c/w chains	
PAINTWORK		
CHASSIS	Painted in high quality 2 pack paint to client specified colour	
BARREL	Painted (External) in high quality 2 pace paint to client specified colour	
WARRANTY		
12 months on structural work		

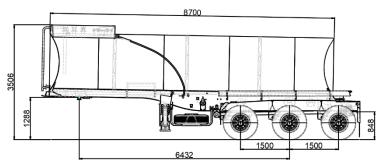



LED WORK LIGHT



STAINLESS STEEL HOSE CARRIER



STAINLESS STEEL PUMP



**REAR END**