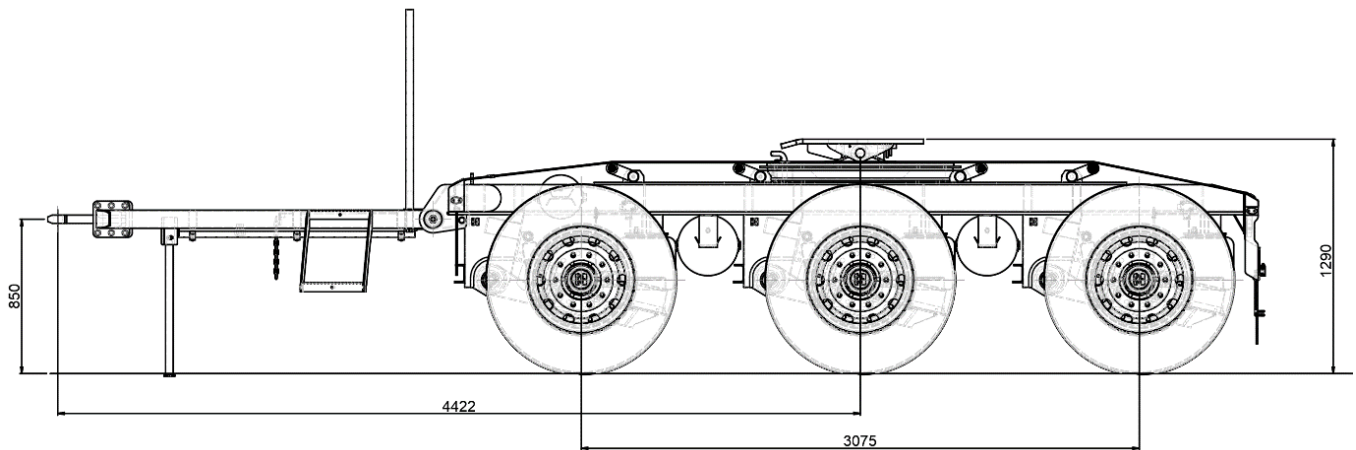


**DOLLY - STANDARD TECHNICAL SPECIFICATION****DIMENSIONS**

LENGTH	4422mm Towing Eye to Centre of Turntable
HEIGHT	Standard Drawbar height 850mm
TT HEIGHT	1290mm standard turntable height
SUSPENSION SPREAD	10'1" Standard Tri-axle dolly spread

CONSTRUCTION

TOWING EYE	50mm Weld-in towing eye
DRAWBAR	Hinged type "A" frame
TURNTABLE	90mm K-hitch with adjustable jaw
BALLRACE	90mm Double row
ON BOARD SCALE	Weigh scale optional
MUDFLAP	All rubber guards over wheel group
MUDGAURDS	GTE flaps to front and rear of suspension
STEP	Steps fitted to "A" frame

ELECTRICAL**LIGHTS**

LED multi-volt lighting to ADR 13/00, Road Train & 7 Pin standard, Wiring in conduit

RUNNING GEAR

SUSPENSION	K-Hitch KT250 Airbag, spring available
AXLES	K-Hitch drum brake axle with 10/285 PCD hubs
WHEELS	10/285 PCD alloy wheels (13)
TYRES	11R22.5 tubeless tyres (13)
YARD RELEASE	Yard Brake release kit

PAINTWORK

Painted in high quality 2 pack paint to client specified colour

WARRANTY

12 months on structural work





GENERAL TRANSPORT EQUIPMENT PTY LTD

PO BOX 54, CLOVERDALE WA 6105

A.B.N. 58 008 903 535 A.C.N. 008 903 535



DOLLY WITH GRAIN TIPPER



TURNTABLE AND BALLRACE



REAR END



TOWING EYE

Cnr McDowell St & Abernethy Road, Kewdale, W.A.
Phone (08) 9352 4000 Email: gte@gtetrailers.com.au