
"U" SHAPE GP TIPPER - STANDARD TECHNICAL SPECIFICATION



DIMENSIONS		
DIMENSIONS	8.4m x 1.4m x 2.5m Body	
CAPACITY	24 Cubic metres nominal	
CONSTRUCTION		
CHASSIS	Hi Tensile steel chassis, "I" Beam Design	
BODY	4mm BHNM450 high tensile steel side wall & floor & front panel 4mm BHNM450 high tensile steel one way tailgate	
SKID PLATE	10mm with 90mm bolt-in Kingpin	
FRONT PANEL	Front ladder, broom and shovel brackets fitted	
TAILGATE	One-way top swing with grain door	
TARP	Auto end to end Mesh Tarp fitted with remote control as standard	
HYDRAULICS	HYVA hydraulic hoist, 1" hydraulic hose fitted to front with coupling	
TOWCOUPLING	Ringfeder fitted with lines to the back	
ON BOARD SCALE	Optional	
MUDFLAP	All rubber guards over tri-group	

ELECTRICAL		
LIGHTS	LED multi-volt lighting to ADR 13/00, Road Train & 7 Pin standard, Wiring in conduit	
RUNNING GEAR		
SUSPENSION	K-Hitch KT250 Airbag	
AXLE	K-Hitch drum brake axle with 10/285 PCD hubs	
BRAKE	EBS Road Train brakes	
LANDING LEG	2 speed wind down legs with compensating feet	
WHEELS	10/285 PCD alloy wheels (13)	
TYRES	11R22.5 tubeless tyres (13)	
TYRE CARRIER	Dual swing c/w chains	
PAINTWORK		
CHASSIS	Painted in high quality 2 pac paint to client specified colour	
BODY	Painted in high quality 2 pac paint to client specified colour	
WARRANTY		
12 months on structural work		



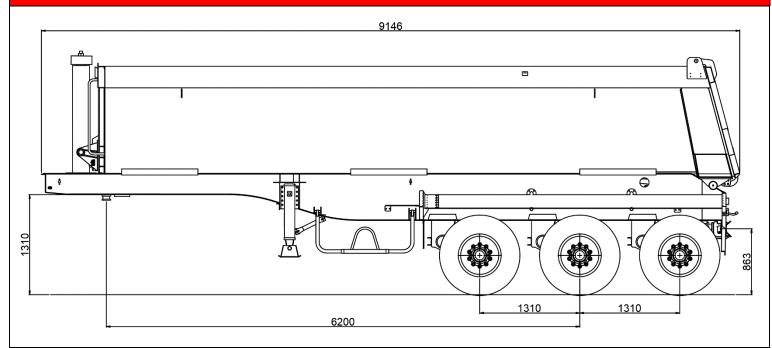

HYVA LIFTING CYLINDER



OPTIONAL RINGFEDER



ELECTRIC BACK TO FRONT TARP STANDARD